


ALTHEA07W 1-Port 20W USB PD Charger, USB-C x 1, PD 3.0

Product Images

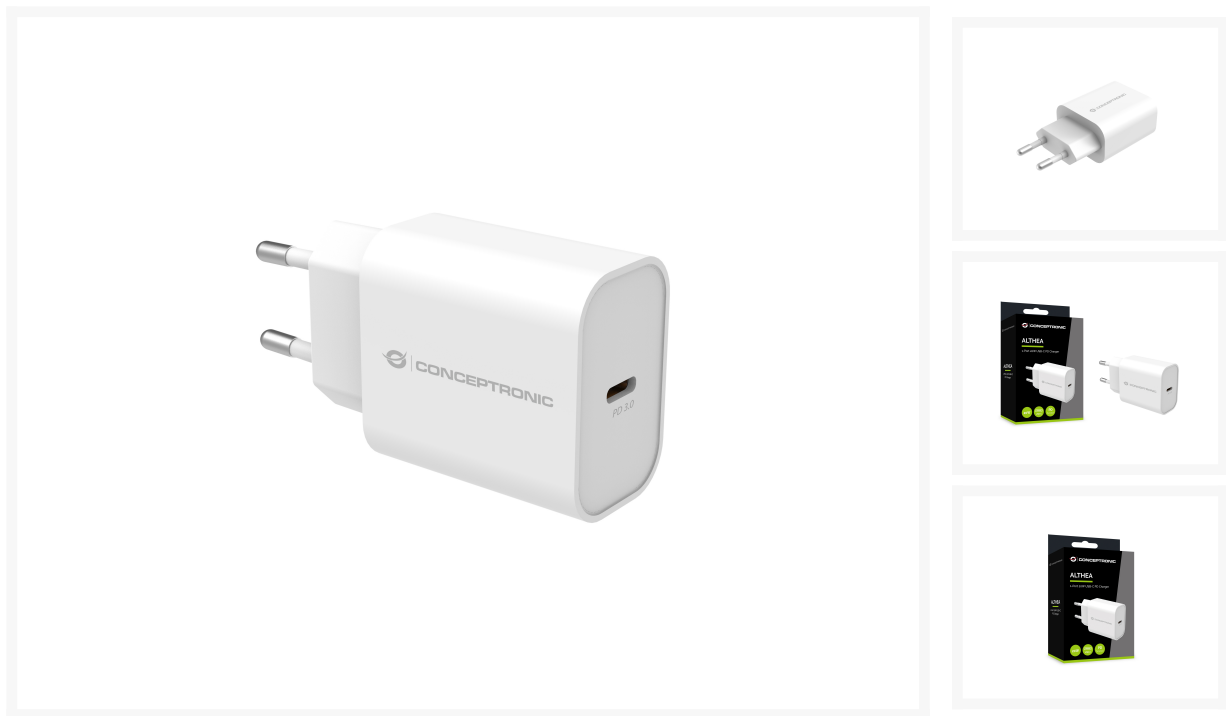

Short Description

- **Dedicated Port Connector:** Equipped with a USB-C ports (with PD 3.0), providing up to 20W of total power and high-speed charging for a wide range of devices with varying power requirement.
- **Wide Compatibility:** Supports a range of output options from 5.0V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 technology for efficient and rapid charging, ensuring broad device compatibility.

Description

This charger is equipped with a dedicated USB-C port featuring Power Delivery (PD) 3.0, providing up to 20W of total power for high-speed charging across a wide range of devices. It supports a range of output options from 5.0V to 12.0V, ensuring compatibility with devices from smartphones to laptops. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Incorporating USB Power Delivery (PD) 3.0 technology, this charger ensures efficient and rapid charging, offering broad device compatibility.

Additional Information

Port Configuration	USB-C x 1
Number of outputs	1
Fast charging technology	Power Delivery 3.0
USB Type-C ports quantity	1
Programmable power supply (PPS) (YES/NO)	No
Housing Material	Polycarbonate (PC)
Number of simultaneously connected devices (max)	1
Port 1 Power Output	USB-C output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A
Power Plug Type	EU
Package Depth	100 millimeter
Package Height	70 millimeter
Package Width	30 millimeter
Package Weight	10 gram
Harmonized System (HS) code	850440
Package Content	Quick installation guide
USB Power Delivery revision	3.0
Operating temperature (T-T) Max	40 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	95%
Storage relative humidity (H-H) Min	5%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	10%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius

Color	White
EAN	4015867230046
Model Number	ALTHEA07W
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	0.5 ampere
Maximum power	20 watt
Icecat_Power protection features	Over current, Over power, Short circuit
Product Height	26 millimeter
Product Width	40.2 millimeter
Product Depth	43.5 millimeter
Product Weight	55 gram

