
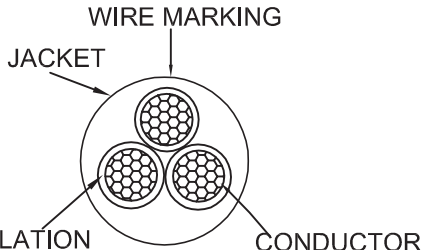


ROHS COMPLIANT

A/O

DATE	REV	DESCRIPTION	BY	CHECK
	A/O			

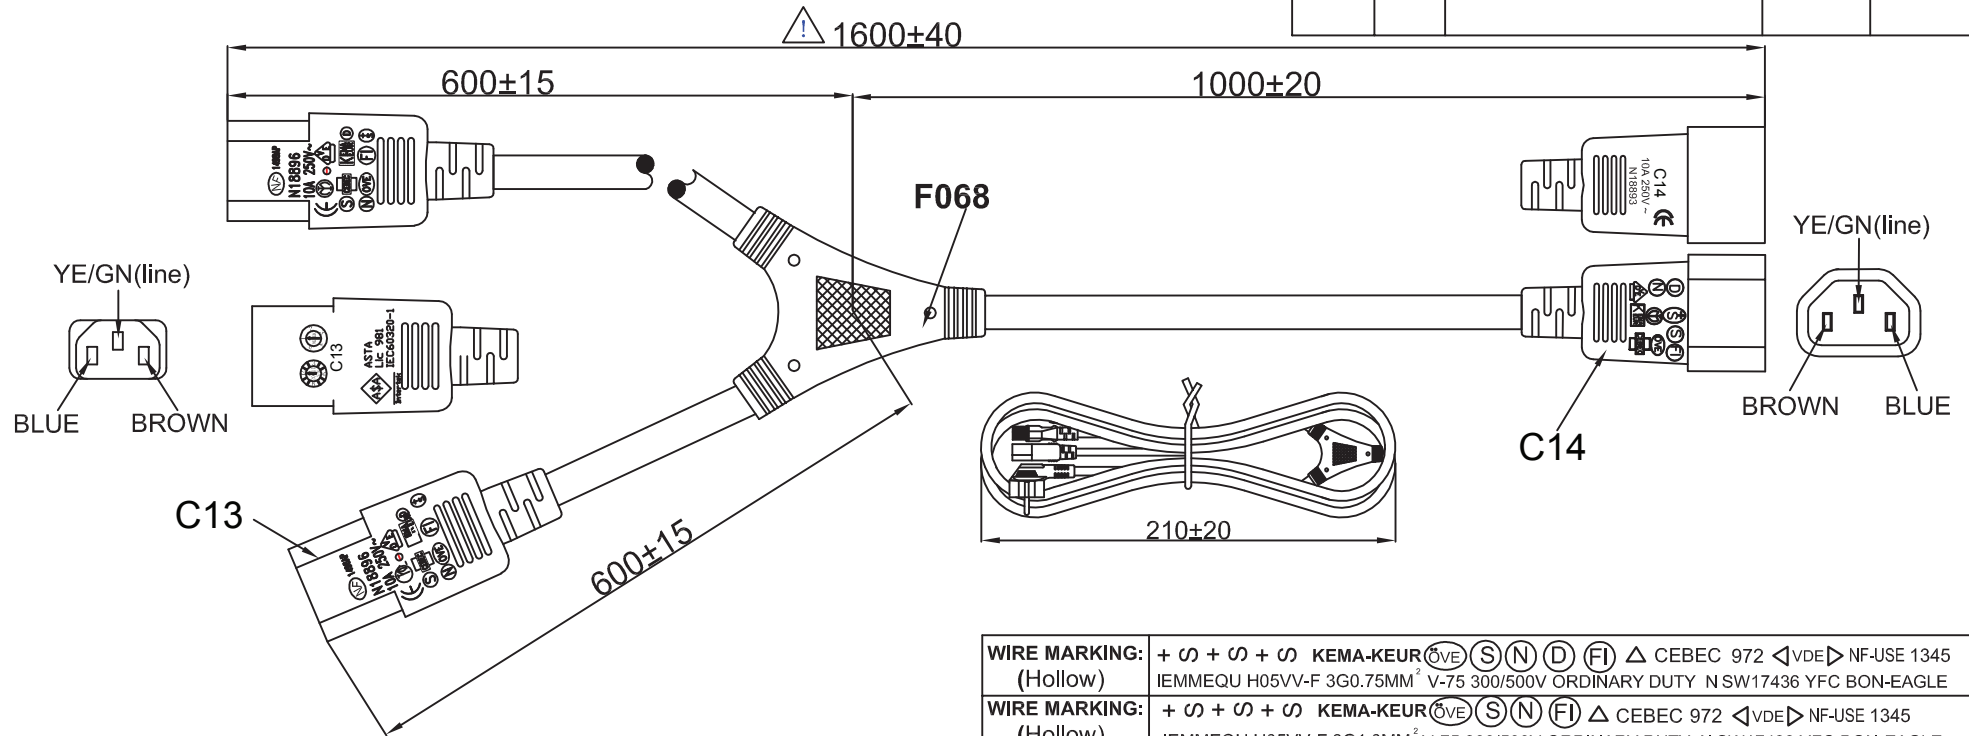

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (VE) (S) (N) (D) (FI) Δ CEBEC 972 <VDE> NF-USE 1345  
(Hollow) IEMMEQU H05VV-F 3G0.75MM<sup>2</sup> V-75 300/500V ORDINARY DUTY N SW17436 YFC BON-EAGLE

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (VE) (S) (N) (FI) Δ CEBEC 972 <VDE> NF-USE 1345  
(Hollow) IEMMEQU H05VV-F 3G1.0MM<sup>2</sup> V-75 300/500V ORDINARY DUTY N SW17436 YFC BON-EAGLE

Conductor		Insulation			Jacket		Overall diameter
mm <sup>2</sup>	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Ghick	
1.0 (32/0.190)	at20°C,19.5ohms/km	<b>0.44mm</b>	<b>2.5±0.1mm</b>	130 ↓ mm	<b>0.58mm</b>	<b>0.8mm</b>	<b>7.0±0.1mm</b>
0.75 (24/0.190)	at20°C,26.0ohms/km	<b>0.44mm</b>	<b>2.4±0.1mm</b>	130 ↓ mm	<b>0.58mm</b>	<b>0.8mm</b>	<b>6.8±0.1mm</b>

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

**ELECTRIC TESTING:**

- 100% OPEN & SHORT TESTING .
- VOLTAGE RATING:AC ≥2000V/S
- PLUG ( C14 ) RATED POWER:250V 10A
- PLUG ( C13 ) RATED POWER:250V 10A
- WIRE: H05VV-F 3\*0.75\*2 RATED VOLTAGE:300/500V & H05VV-F 3\*1.0\*1 RATED VOLTAGE:300/500V
- COLOR:BLACK
- LENGTH:2.2M(0.6M+0.6M+1.0M)

PAGE	1/1					
	⚠					
Unless specified on the drawing, tolerances are per the follows: .X ± 1 .XX ± 0.5 .XX ± 0.1		DESCRIPTION	112210 High Quality Power Y-Cable			
		CUSTOMER NAME		CUSTOMER NO.		
		CUSTOMER PART NO.		DRAW		DATE 2011/11/21
		SCALE		CHECK		DATE 2011/11/21
		UNIT	MM	APPROVAL		DATE
3RD	⊕	PATH NAME				