



HDMI Dongle Adapters

- Converts an HDMI Digital A/V signal to VGA or DVI
- Maximum resolution of 1080p
- Utilizes Micro USB for power (VGA dongles)

Electrical Characteristics:

Resolutions Supported:	480i/480p, 576i/576p, 800x600, 720i/720p 1280x1024, 1600x1200, 1080i/1080p
Voltage:	5V, 500mA (VGA models)
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

Physical Characteristics:

Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

Conductor (Qty. 3): (Part #80500, 80502)

Conductor Type:	32AWG 7/0.08TCS x15 Tinned Copper
Insulation:	Foam-PE, $\varnothing 0.63 \pm 0.05$
Shield:	AL Wrap; Braid, 16/6/0.12AMA 75% Coverage
Drain:	32AWG 7/0.127B

Overall Cable



Jacket:	PVC, Black
OD:	5.5 \varnothing 0.2

Conductor (Qty. 3): (Part #80501)

Conductor Type:	34AWG 7/0.06TCS x15 Tinned Copper
Insulation:	Foam-PE, $\varnothing 0.5 \pm 0.05$
Shield:	AL Wrap; Braid, 16/10/0.08TCS 85% Coverage
Drain:	34AWG 7/0.127B

Overall Cable

Jacket:	PVC, Black
OD:	4.8 \varnothing 0.15

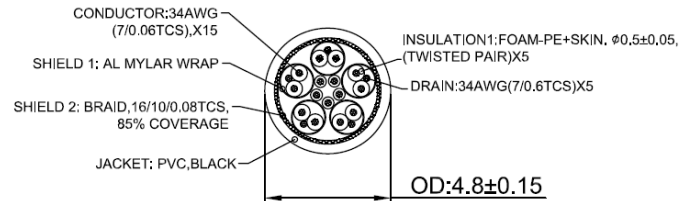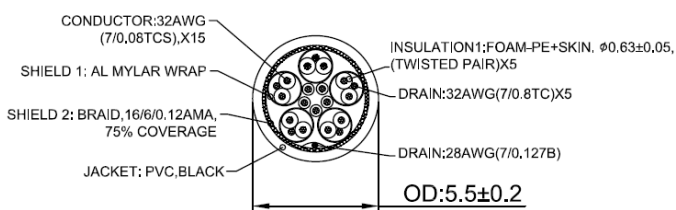

Part Number	Description	Weight (Kg)
80500	HDMI Male to VGA Female Dongle with Power	
80501	HDMI Male to VGA Female Dongle with Power and Audio	
80502	HDMI Male to DVI Female Dongle	



Cables To Go
Road 30 Hortonwood Industrial Estate
Telford, Shropshire TF1 7AB UK
UK Phone (0)800 328 2916
EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

