

W12000

The Definitive Windows Storage Server



When data is sent to multiple users, single-instance storage allocates data to be stored once, eliminating the need to duplicate data storage. This results to reduced data storage and improved data backups. Single-instance storage is most functional when transferring data to large distribution directories by improved delivery efficiency.



No CALs required benefits users the ability to access the services of the server without a permit. With this, business users will not have to go through the trouble of obtaining authorization of per-user or per-device. With no CALs required, users are able to access data on demand, without the troubles of CALs.



The evolved PCI-e Gen2 offers innovative technology that saves cost with an efficient narrow configuration.

While doubling the transfer rate of the previous PCI-e, the PCI-e Gen2 provides the same bandwidth as the PCI-e but with only half its lanes. The target is to save on cost and provide an improved PCI-e for users. The Gen2 provides a significant improvement on system performance over the PCI-e; users can now enjoy faster transfer speeds and connectivity.



The next generation of connectivity is here with speeds 10x faster than USB 2.0. Whether connecting digital cameras and smart phones, backing up large external hard drives, or extending the capacity of your NAS, USB 3.0 will make sure it's done in no time at up to 5 Gbit/s. Backwards compatibility adds the connectivity of a world full of USB 2.0 and USB 1.1 devices to get the best combination of speed and universal access.



Make your NAS into the ultimate multimedia hub! The W12000's HDMI output allows you to connect your NAS directly to your TV for device management.



High-end data centers often need a level of speed that today's average Internet cannot provide. This Thecus NAS is 10Gb Ethernet ready to satisfy the toughest needs of today and tomorrow.

W12000

Specifications

Hardware Platform

Processor

- Intel® Xeon® E3-1225 3.1GHz

System Memory

- 8GB DDR3 SDRAM

Storage (for Pre-installed OS)

- 2.5" SATA
- 250GB 5400rpm/7200rpm above

LAN Interface (PCI-e)

- RJ-45x3

USB Interface

- USB 2.0 host port x6 (front x2, back x4) (Type A)
- USB 3.0 host port x2 (back x2)

LED Indicator

- Power: (blue)
- HDD 1-12 Activity/Fail (green/red)

HDMI Output

- HDMI port (back x1)

Audio

- MIC input, Line input, Audio output

Disk Interface

- 12 x SATA for internal
- 1 x eSATA for external

Power Supply

- Redundant power supply 500W or more

Thermal/Fan Control

- Thermal sensor on processor temperature
- CPU fan control
- System fan control

Buttons

- Power button (Front, shutdown controlled by user interface)
- System reset button
- Locator button

RS232

- 1 (For UPS)

Environment


- Temperature: 5°C to 40°C
- Humidity: 0 ~ 80 % R.H. (Non-condensing)

Chassis

- 2U Rack mount

Dimensions (HxWxD)

- 89 x 440 x 662 (mm)

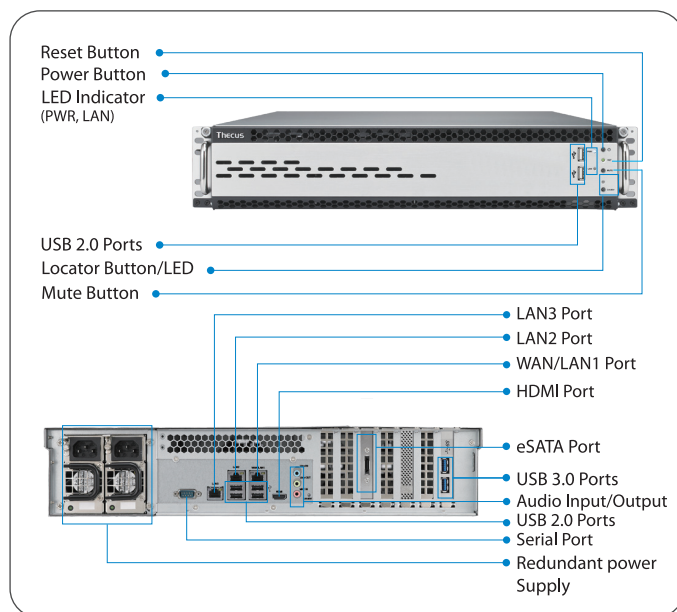

Software Functions

(Optional, Windows Storage Server 2008 R2 Standard Version)

Windows Storage Server 2008 R2 Standard is a robust and reliable foundation on which to develop, deliver, and manage rich user experiences and applications. Windows Storage Server 2008 R2 Standard provides a secure network infrastructure and reduces costs while increasing technological flexibility and value within your organization.

Summary of Features

- Up to 250 Network Access Service connections (RRAS)
- Up to 50 Network Policy Server connections
- Up to 250 Remote Services Gateway connections
- Active Directory® Lightweight Directory Services
- BranchCache
- DirectAccess
- Virtualization services (Hyper-V guest support)
- Files services
- Print services
- Windows® SharePoint® Services
- Web services
- iSCSI Block storage services
- Network Access Protection (NAP)
- Remote Desktop Services
- Internet Information Services 7.5
- Server Manager
- Windows Powershell 2.0

Feature (Windows 2008 Storage Server R2 (Standard))

- RAID Level: RAID 0, 1, 5 and JBOD
- #Users: Unlimited
- File Classification Infrastructure (FCI): Supported
- File Server Resource Manager (FSRM): Supported
- Domain join: Supported
- Shared block storage (iSCSI Target+Boot): Supported
- iSCSI Software Target 3.3: Supported
- Single Instance Storage: Supported
- Virtualization (Hyper-V host support): Supported
- .NET 3.0: Supported
- .NET Framework 3.5.1 Features: Supported
- Administration Tools: Supported
- Bit Locker Drive Encryption: Supported
- BITS Server Extensions: Supported
- Desktop Experience: Supported
- Direct Access Management: Supported
- Group Policy Management Console: Supported
- Ink and Handwriting Services: Supported
- Internet Printing Client: Supported
- LPR Port Monitor: Supported
- Microsoft Message Queuing (MSMQ): Supported
- Multipath I/O: Supported
- Peer Name Resolution Protocol: Supported
- Quality Windows Audio Video Experience: Supported
- RAS Connection Manager Administrator Kit: Supported
- RDC: Supported
- Remote Assistance: Supported
- Remote Differential Compression: Supported
- Remote Server Admin Tools: Supported
- RPC Over HTTP Proxy: Supported
- Simple TCP/IP Services: Supported

- SMTP: Supported
- SNMP: Supported
- Storage SAN Manager for SANS: Supported
- Subsystem for Unix-Based Applications (SUA): Supported
- Telnet Client: Supported
- Telnet Server: Supported
- TFTP Client: Supported
- Windows Biometric Framework: Supported
- Windows Internal Database: Supported
- Windows PowerShell Integrated Scripting Environment (ISE): Supported
- Windows PowerShell: Supported
- Windows Server Backup: Supported
- Windows Server Backup Features: Supported
- Windows Server Migration Tools: Supported
- Windows System Resource Manager (WSRM): Supported
- Windows TIFF IFilter: Supported
- Wireless Client: Supported
- Wireless LAN Service: Supported
- XPS Viewer: Supported



*Design and specifications are subject to change without prior notice.

Thecus® Creator in Storage
www.thecus.com

Thecus® HQ

15F., No.79, Sec. 1, Sintai 5th Rd., Sijhih Dist, New Taipei City 221, Taiwan (R.O.C.)
Email: sales@thecus.com Facebook: www.facebook.com/Thecus
Forum: forum.thecus.com Twitter: twitter.com/Thecus_Storage

Thecus® U.S.A., Inc.

487 Montague Expressway, Milpitas, CA 95035
Email: support@us.thecus.com
Tech support: ussupport.thecus.com/esupport

Thecus® NL B.V.

Marinus Dammeweg 7, 5928 PW Venlo, the Netherlands
Email: thecus_nl@thecus.com
Tech support: esupport.thecus-eu.com
Support Email: support_nl@thecus.com

Thecus® China

13th Floor Room G, Investment Building, Zhongshan South Road No. 414, Qinhua District, Nanjing City, China
Support Email: support_cn@thecus.com