

SPECIFICATION SHEET



Locking C14 to C13 Power Cords

- Locking C13 connector ensures port retention to critical equipment
- Constructed of heavy duty 17AWG conductors
- Rated up to 250V 10A
- CE rated, UL listed, TAA compliant
- Lifetime Warranty


Specifications: Locking C14 to C13 Power Cords

Electrical Specifications:

Voltage Rating:	300V
Amp Rating:	10A
Conductor:	32/0.200mm ± 0.002mm

Physical Specifications:

Overall Diameter:	7.9mm ±0.2mm
Average Insulation Thickness:	0.76mm
Operating Temperature:	-10~70°C; 50±20%RH
Storage Temperature:	-20~50°C; 50±20%RH
Certifications:	(UL) SJT E90165, ROHS, CE

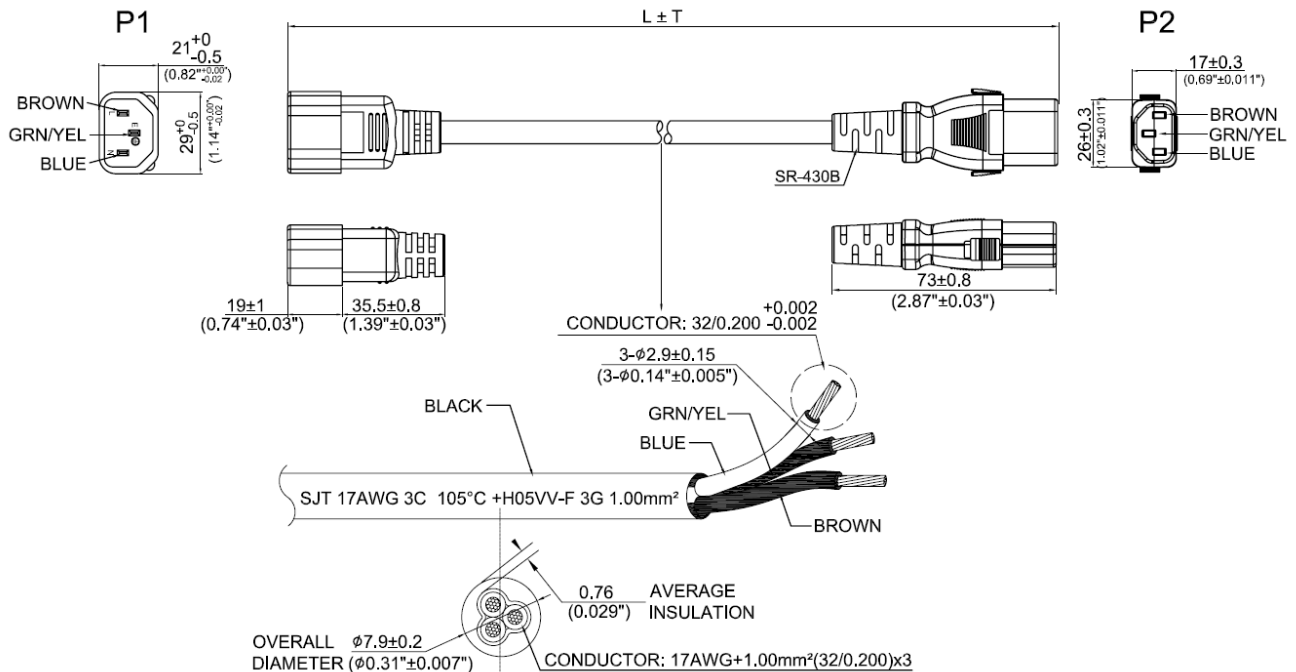

Part Number	Description	Weight (lbs)
80700	1ft (.3m) Locking C14 to C13 10A 250V Power Cord Black	.145
80701	2ft (.6m) Locking C14 to C13 10A 250V Power Cord Black	.198
80702	3ft (.9m) Locking C14 to C13 10A 250V Power Cord Black	.265
80703	6ft (1.8m) Locking C14 to C13 10A 250V Power Cord Black	.485
80704	10ft (3m) Locking C14 to C13 10A 250V Power Cord Black	.816
80705	15ft (4.5m) Locking C14 to C13 10A 250V Power Cord Black	1.279



Great King Street North
 Birmingham, West Midlands B19 2LF
 UK Phone (0)800 328 2916
 EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

