


FCS-3098 GEMINI Zoom Dome IP Camera, 8-MP, H.265,

Product Images

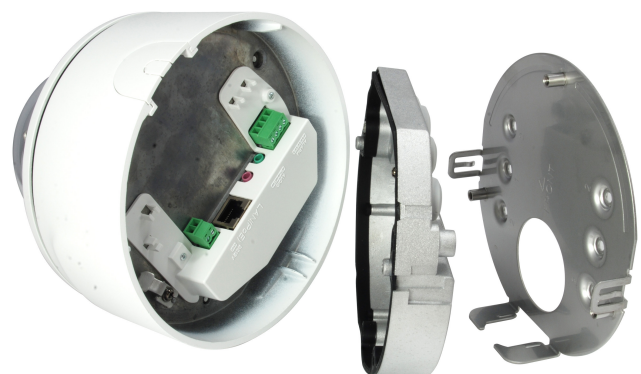

Short Description

- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Built-in Micro SDHC/SDXC card slot for local storage
- Built-in infrared LEDs for night viewing up to 40m
- Dual power support: 12V DC/PoE (IEEE 802.3af)
- 8-Megapixel high-definition resolution
- Video compression: H.264, H.265, MJPEG
- Vandal-proof IK10-rated housing
- Weatherproof IP67-rated housing
- Supports 4.3X optical zoom

Description

The LevelOne FCS-3098 Fixed Dome Outdoor Camera offers a highly reliable, cost-effective outdoor IP surveillance solution in a low-profile dome mounted casing, which is rated at IP67 and able to withstand outdoor operating conditions such as rain, snow, extreme heat, dust and humidity. The FCS-3098 offers 8-Megapixel resolution, and with 802.3af standard PoE, can use a single Cat.5 cable to run both power and data, making deployments easy and flexible. The dome mounting prevents malicious tampering with the camera, making it a secure and smart choice for all outdoor installations.

Additional Information

| | |
|-------------------------|---|
| Approval and compliance | CF/FCC,UL,IK10,IP67 |
| Supported browsers | Plug-in required live view: IE8+, Chrome 41.0-44, Firefox 30.0-51, Safari 8.0-11, Plug-in free live view: Chrome 45.0+, Firefox 52.0+ |
| Operating temperature | -30°C ~ 60°C |
| Storage temperature | 0°C ~ 95°C |
| Angle of View (°) | Horizontal field of view: 115 to 35 Vertical field of view: 60 to 19 Diagonal field of view: 146 to 38.5 |
| Audio format | G722.1/G711ulaw/G711alaw/G726/MP2L2 |
| Image sensor | 1/2.5" Progressive Scan CMOS |
| Indicators | Power |
| IR cut filter | Yes |
| IR range | Up to 30 meter |
| Lens | 2.8~12mm motorized VF lens,F2.0 |
| Optical zoom | 4.3X Optical Zoom |
| Resolution | 50Hz: 20 fps (3840 * 2160), 25 fps (2944 * 1656, 2560 * 1440, 1920 * 1080, 1280 * 720) 60Hz: 20 fps (3840 * 2160), 30 fps (2944 * 1656, 2560 * 1440, 1920 * 1080, 1280 * 720) |
| Shutter time | 1/3 ~ 1/100,000 sec |
| Storage capacity | Built-in microSD/SDHC/SDXC slot, up to 128 GB |

| | |
|--------------------------|---|
| Standards | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP,SMTP, SNMP, IGMP, 802.1X, QoS, IPv4, IPv6 |
| Video format | H.265, H.264,MJPEG rotate mode. Brightness, contrast, saturation, and sharpness are adjustable via web browser,Motion Detection Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2 Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error) Line crossing detection, intrusion detection, unattended baggage, object removal, face detection, scene change detection Trigger recording: memory card, network storage, pre-record and post-record Trigger captured pictures uploading: FTP, HTTP, NAS, Email Trigger notification: HTTP, ISAPI, alarm output , Email |
| Features | |
| Product weight (kg) | 1,287 |
| Color | White |
| EAN | 4015867203019 |
| Model Number | FCS-3098 |
| Package contents | FCS-3098 Screw Kit |
| Camera Type | Dome |
| Resistance | Weatherproof |
| Zoom Type | Motorization |
| 2-way Audio | Yes |
| IR Leds for night vision | Yes |
| PoE Supported | Yes |
| Max. Resolution | 8 Megapixels |
| IP Camera series | GEMINI |
| Power consumption | 11.5-12.9W |
| Dimensions (W x D x H) | 133.1 x 153.4 x 153.4 mm |

