



16-port Combo KVM Switch w/ Expansion Slot



KVM-1631

H/W Version: 2


The LevelOne KVM-1631 16-port combo KVM switch enables users to control and manage several computers or even an entire server farm, using a single keyboard, mouse and monitor. Users can switch to different servers using hot-keys or push button for fast control of the connected devices.

Up to 128 computers can be connected to KVM-1631 using a daisy chain. This gives network administrator the ability to control large groups of servers or systems from one console without the need to physically move between different monitoring stations.

Advanced Remote Management via optional modules

LevelOne also offers a unique module for remote server control. Just slide in the IP Console Module (ACC-2000) to KVM-0831/1631 to access and manage the server farm over the Internet using a standard web browser. It supports a 1600x1200 pixel screen resolution for high-quality viewing.

LevelOne also has a module (ACC-1000) that allows system administrators to extend the control over the LAN using Cat.5 cabling to control servers and PCs remotely up to 300 meters away.

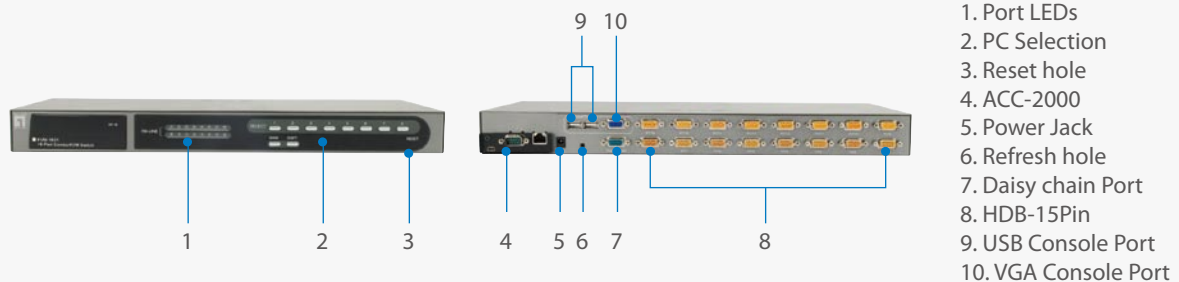

Key Features

- Control servers and computers either locally via control port or remotely via optional modules through the module expansion slot
- Features an expansion slot for flexible installation with optional module choices
- Locate Cat5 console up to 300 meters away from the KVM switch.
- To enable/disable the Screen Saving function and 10 min auto-logout function.
- High video display quality – up to 1920x1440
- Firmware Upgradable

Works Well With



ACC-2000
KVM IP Console Module



KVM-9007
KVM Cat.5 Receiver




Technical Specifications

Console Port	USB x 2, VGA x 1
PC Port	(PS2/USB/VGA) Combo connector x 16
Cascade Control PC no.	128
Cable Model Name	ACC-2001 ACC-2002
Applicable to Computer	PS2/USB
OSD	Yes
Pushbutton Control	Yes
LEDs	16
Hot plug and Play	Yes
Hotkey Control	Yes

Rack-Mounted	19" industry-standard
Scan interval	5~99 sec
Resolution	1920 x 1440
Dimension (mm)	445(H) x 160(W) x45(H)
Size	1U
Power Supply	DC 12V, 1A
Operation Temp.	Operating: 0~50°C
Storage Temp.	-20°C ~ 60°C
Humidity	0~95%, Non-Condensing

Product Diagram

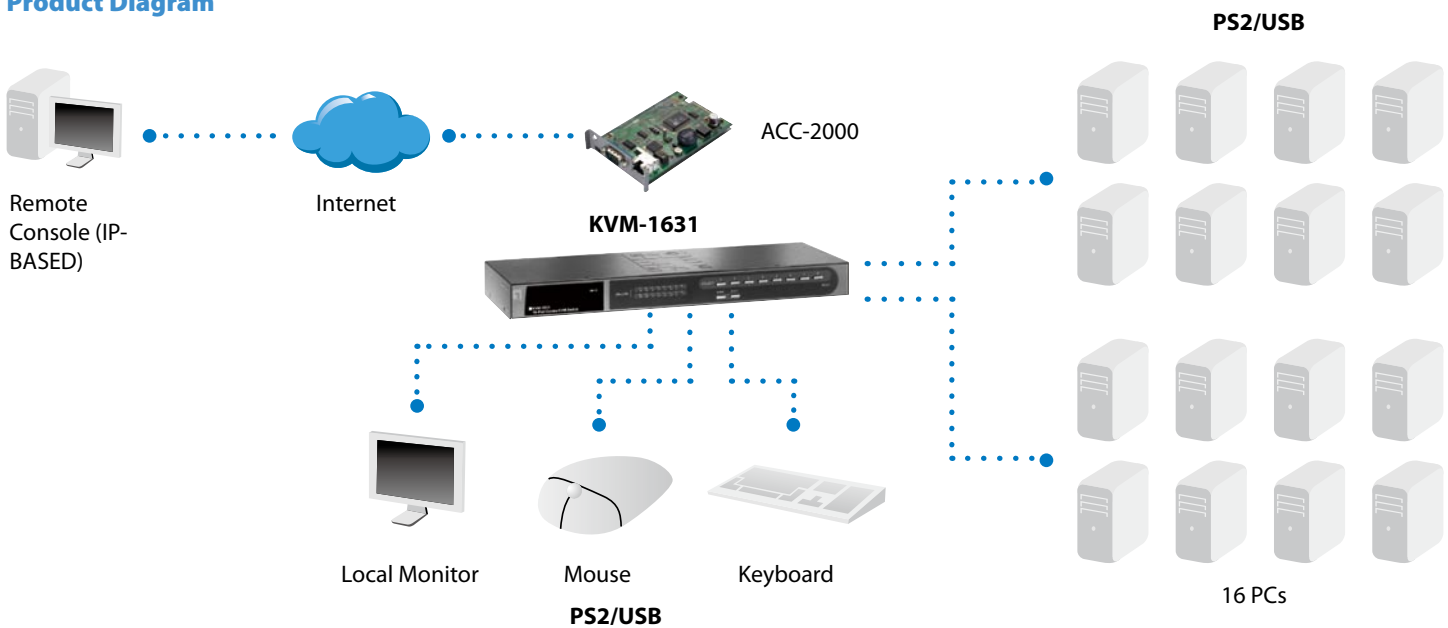

Order Information

KVM-1631: 16-port Combo KVM Switch w/ Expansion Slot

Package Contents

KVM1631, Power Adapter DC 12V, 1.0A, Rack Mount Kit, Rubber Feet, User Manual

Option Accessories



ACC-2109
Daisy Chain Cable 90cm



ACC-2101
PS/2 and USB Cable KVM
1.8m



ACC-2102
PS/2 and USB Cable KVM
3.0m



ACC-2103
PS/2 and USB Cable KVM
5.0m

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.