


ALTHEA06W 2-Port 12W USB Charger, USB-A x 2

Product Images

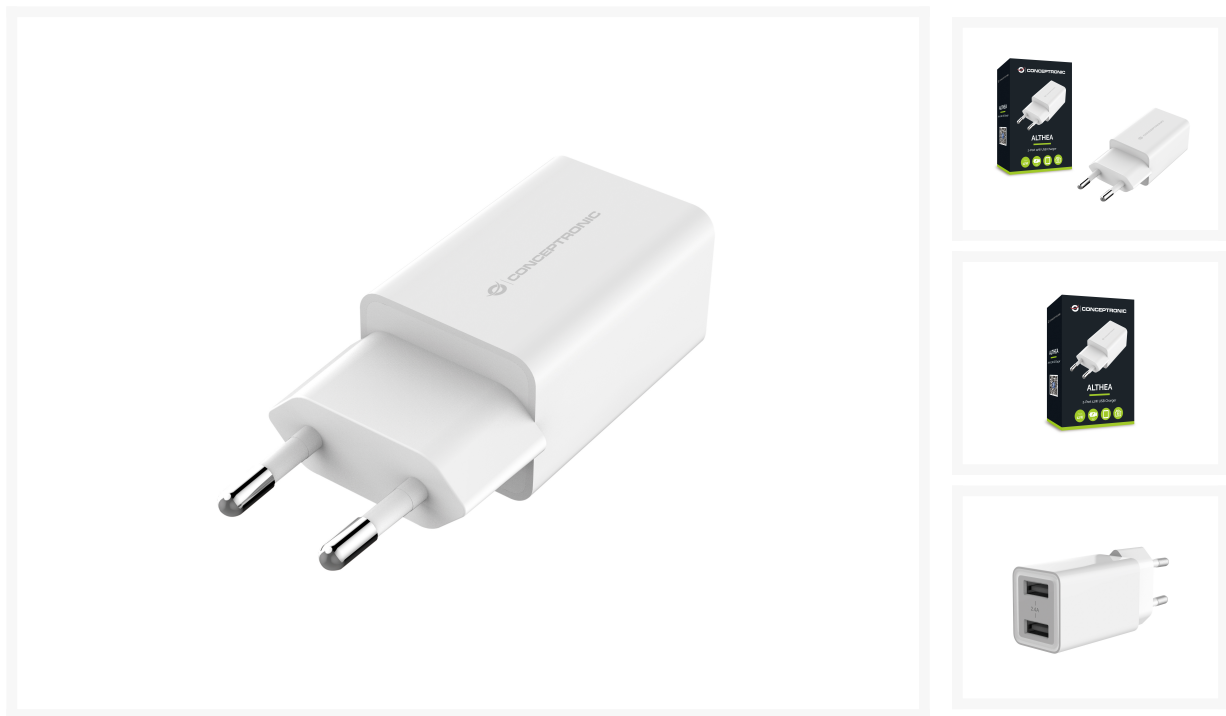

Short Description

- **Dedicated Port Connector:** Equipped with 2 USB-A ports, each providing DC 5.0V/2.4A, offering up to 12W of total power and high-speed charging for a wide range of devices with varying power requirement.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.

Description

Equipped with 2 USB-A ports, each providing DC 5.0V/2.4A, this charger offers up to 12W of total power for high-speed charging across a wide range of devices with varying power requirements. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and the

connected devices.

Additional Information

Number of outputs	2
USB Type-A ports quantity	2
Programmable power supply (PPS) (YES/NO)	No
Housing Material	Polycarbonate (PC)
Number of simultaneously connected devices (max)	2
Port 1 Power Output	DC 5.0V/2.4A
Port 2 Power Output	DC 5.0V/2.4A
Power Plug Type	EU
Package Depth	28 millimeter
Package Height	90 millimeter
Package Width	61 millimeter
Package Weight	10 gram
Harmonized System (HS) code	850440
Package Content	Quick installation guide
Operating temperature (T-T) Max	40 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	10%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	20%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Color	White
EAN	4015867223284
Model Number	ALTHEA06W

Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	0.3 ampere
Maximum power	12 watt
Icecat_Power protection features	Over current, Over power, Short circuit
Product Height	50 millimeter
Product Width	31 millimeter
Product Depth	26 millimeter
Product Weight	38.5 gram

