



SFP-3411 Version: 1

1.25Gbps Single-mode SFP Transceiver, 40km, 1310nm

The LevelOne SFP-3411 is a high performance and cost-effective single-mode SFP transceiver. Intended for use with Gigabit Ethernet, it provides up to 1.25 Gbps bidirectional data transfer rate on a single duplex fiber core. For use with 9 and 125 micron fiber cables, it can reach a distance of up to 40km. The SFP-3411 transceiver operates using a wavelength of 1310nm with a FP Laser Diode light source and has an LC port.

Key Features

- IEEE 802.3z Gigabit Ethernet compliant
- Supports Digital Diagnostics Monitoring Interface (DDMI) for easy status monitoring
- Compatible with SFP Multi-Sourcing Agreement (MSA) standards
- Hot-swappable providing non-stop service
- Provides duplex LC connector
- RoHS compliant and Lead Free

Specifications

System Specifications

Standards:

• IEEE802.3z 1000BASE-LX

Port:

- Duplex LC Connector
- 9/125 µm Single-mode Fiber

Wavelength (nm):

• 1310nm

Optical Receive Sensitivity:

• -25dBm

Optical Link Power Budget:

• 20dB

Power Input:

• 3.3V / 250mA

Power Consumption:

- 800 mW (0°~70°C)
- 1000 mW (-40°~85°C)

www.level1.com Page 1 of 3

Data Rate:

• Up to 1.25Gb/s data links

Optical Transmission Power:

• TX Power: -5 to 0 dBm

• RX Power: -25 to -2 dBm

Operating Temperature (°C):

• 0°~70°C

Operating Humidity (Non-condensing):

• 0~85%

Storage Temperature (°C):

• -40°~ 85°C

Features

General:

• Hot-swappable

Management:

• DDMI (Digital Diagnostics Monitoring Interface)

Performance

Operating Distance:

• 40Km

Physical Specifications

Dimensions (W x D x H mm):

• 57 x 13.7 x 8.5 mm

Weight (g):

• 20 g

Approval and Compliance

EMI/EMS:

- EMC Directive 2014/53/EU
- IEC 61000-4-3 / IEC 61000-4-2

Safety:

- EMI compatible with FCC Part 15 Class B
- EN55022 Class B (CISPR 22B) VCCI Class B
- Class 1 Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950
- EN (IEC)60825-1/2

Environmental Test:


• RoHS Directive 2011/65/EU


Others:


• MIL-STD-883 Method 3015

www.level1.com Page 2 of 3

Diagram



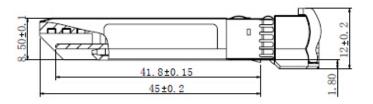

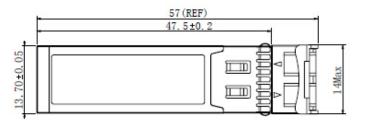

Measurement Unit: mm

Order Information

SFP-3411

Package Contents

SFP-3411 Quick Installation Guide

Digital Data Communications GmbH Hohe Straße 1, 44139 Dortmund, Germany

Specifications are subject to change without notice. No liability or responsibility for any errors or omissions in the content. Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.

www.level1.com Page 3 of 3