



## DATA SHEET

### USB-C<sup>®</sup> Male to USB-A Male Cable – USB 3.2 Gen 1 (5Gbps)

Power, charge, and transfer data to and from any standard USB-C and USB-A device

#### OVERVIEW

The USB-C Male to USB-A Male Cable - USB 3.2 Gen 1 (5Gbps) is the perfect solution for connecting any standard USB-C enabled device to a USB-A device or accessory for charging and data transfer.

Ensure that a USB-C equipped laptop, smartphone, or tablet has a full charge and ready to go from the 3A charging output while simultaneously transferring photos, music, or data at speeds up to 5 Gbps. With a transfer rate of up to 5Gbps, it is fully backward compatible with USB 3.0, 2.0, and 1.1 devices.

The symmetrical design of the USB-C connector is identical on both sides, so it does not matter if you plug it in upside-down or right-side-up. It will plug in the first time, every time, while preventing damage to the connector port. There is no need to worry about software or drivers to install. The plug-and-play feature makes it simple to connect and start using right away.

#### FEATURES

- Designed to support USB 3.2 Gen 1 (5Gbps) communication and features
- 3A charging output to keep your devices fully charged and ready to go
- Backwards compatible with USB 3.0, 2.0, and 1.1 devices
- Reversible, symmetrical USB-C connector
- Plug and Play—no software or driver required

#### ITEM DESCRIPTION

C2G28874	0.15m USB-C Male to USB-A Male Cable - USB 3.2 Gen 1 (5Gbps)
C2G28875	0.3m USB-C Male to USB-A Male Cable - USB 3.2 Gen 1 (5Gbps)
C2G28876	0.45m USB-C Male to USB-A Male Cable - USB 3.2 Gen 1 (5Gbps)

## SIGNAL SPECIFICATIONS

- Supports USB 3.2 Gen 1 SuperSpeed (5Gbps) transmission

## ELECTRICAL SPECIFICATIONS


- Rating: Temp 80° C; Voltage 30V
- Conductor Resistance: At 20°C Max 30AWG: 378 OHMS/KM
- Insulation Resistance: 10M-KM Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown (EIA-364-20)

## PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +50°C
- Operating Humidity: 15% to 85% RH (No Condensation)
- Storage Temperature: -25°C to +70°C
- Storage Humidity: 15% to 85% RH (No Condensation)

## PHYSICAL CHARACTERISTICS

- USB-C Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation
- USB-A Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Blue Insulation
- USB-C Male Molding Material: Black PVC Conforms ROHS
- USB-A Male Molding Material: Black PVC Conforms ROHS
- Cable OD: 4.8mm
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

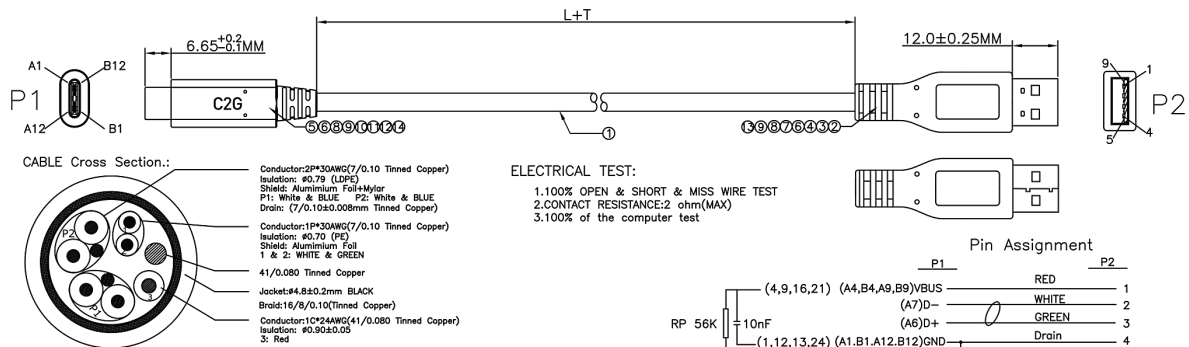

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | [c2g.com/uk](http://c2g.com/uk) | [legrandav.com](http://legrandav.com)

EMEA P +31 495 580 840 E [c2g.emea@av.legrand.com](mailto:c2g.emea@av.legrand.com)

©2021 Legrand AV Inc. 210385-C2G28874-6 Rev A 6/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.