


# 605697 Cat.6A Platinum S/FTP Patch Cable, 0.5m , Black

## Product Images



## Compatible

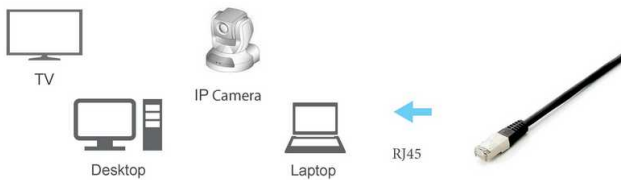



## Short Description

---

1. 4 x 2 AWG 26/7
2. 500MHz performance Bandwidth
3. Transmission: 10Gbit
4. Suitable for PoE, PoE+, PoE++
5. Stranded bare copper conductor
6. Foil and braid shield Reduces EMI/RFI interference
7. PIMF (Pairs in metal Foil)
8. Molded boot with Strain relief
9. RoHS compliant
10. Low Smoke Zero Halogen (LSZH/LSOH)
11. with 3P certificate and UL listed
12. Compliant with ISO/IEC 11801 and EN 50173

## Description

---

Cat.6A Pro S/FTP Patch Cord is composed of preeminent materials and fully-examined to Cat.6A Platinum S/FTP Patch Cord is composed of preeminent materials and fully-examined to conform with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6A cable is able to deliver ultrahigh and error-free performance in the most demanding network environments, specially for 10G application.

## Additional Information

---

|                         |          |
|-------------------------|----------|
| Approval and compliance | RoHS, 3P |
| Conductor material      | Copper   |
| Conductor size (AWG)    | 26AWG    |
| Jacket material         | LSZH     |
| Category                | Cat.6A   |
| Flat cable              | No       |

|                        |                       |
|------------------------|-----------------------|
| Shielded               | Yes                   |
| Product weight (kg)    | 0,035                 |
| Cable length           | 0,5m                  |
| Color                  | Black                 |
| EAN                    | 4015867163306         |
| Model number           | 605697                |
| Package contents       | 605697                |
| Cable Length           | 0.50m                 |
| Shielding              | S/FTP                 |
| Connector 1            | RJ45 male             |
| Connector 2            | RJ45 male             |
| Dimensions (W x D x H) | 8.34 x 11.68 x 500 mm |

