




IGP-1031, 10-Port Gigabit PoE Industrial Switch, DIN-Rail, -40°C to 75°C

Product Images

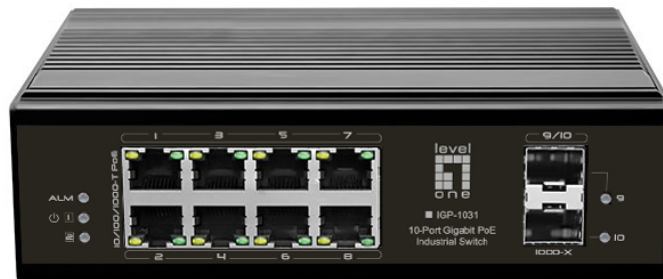

Short Description

- 10/100/1000Mbps wire speed transmission and reception
- Built-in 8 PoE ports for PoE devices
- 8 Gigabit Ethernet ports and 2 Gigabit SFP slots
- 6KV surge protection level on each port
- ESD and surge protection
- Supports the PoE auto-check function, which is specially designed to solve the problems of equipment frozen. It can automatically detect the frozen PD equipment and restart the port's output of PoE, and restart the PD device. It gently reduces the maintenance difficulty of engineering.
- Powerful DIP switch button configuration for PoE Auto-Check, and Extension mode / Default mode / VLAN mode features.

Description

LevelOne IGP-1031 Industry Ethernet Switch provides 8 PoE ports 10/100/1000Base plus 2 port Gigabit SFP to enable high speed network at mission-critical environment. With the industrial standard DIN-rail mount; this switch can be easily installed in the cabinet, plus the clearly visible status LEDs provide simple monitoring of port link activity. Moreover, the SFP slots support pluggable modules that enabling you to choose from a variety of transceivers. This switch is Power Sourcing Equipment (PSE), and it is fully complied with IEEE802.3af/at PoE standard at maximum 30W each port power budget. It helps to save infrastructure wiring costs dramatically by eliminating electric wiring and less UPS needed. Also, it is compatible with IEEE802.3af standard PD devices.

Additional Information

Approval and compliance	CE/FCC Surge: 6KV, standard: IEC61000-4-5 ESD: 8KV: contact/15KV: air, standard:IEC61000-4-2
Max. operating humidity (%)	95
Max. operating temperature (°C)	75
Max. storage humidity (%)	95
Max. storage temperature (°C)	85
Min. operating temperature (°C)	-40
Min. storage temperature (°C)	-40
Backplane (Gbps)	20Gbps
Packet buffer	1M
Indicators	Power :Red Act/Link :Green 10/100/1000 Green PoE :Yellow
MAC address table	8K
Mount	DIN rail mount
Pin assignment and polarity	1/2 (+), 3/6 (-)
Power supply	VDC 48~57V
Standards	IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3af for POE IEEE802.3at for POE+
Power switch	No
Power Consumption	<15W without PoE
General features	PoE Auto-check : If detect the frozen PD device, switch will restart it. IEEE 802.3af/at MTBF: 400k hours
Product weight (kg)	1
Product breadth (mm)	165
Product depth (mm)	114
Product height (mm)	50

Color	Black
EAN	4015867223963
Model number	IGP-1031
Package contents	IGP-1031 Power Terminal Block Quick Installation Guide
Gigabit RJ45/SFP combo	2
Gigabit RJ45	8
802.3af/at PoE	8
Grade	Industrial
Data Rate	Gigabit Ethernet
PoE Supported	Yes
Manageable	No
Fanless	Yes
Concurrent ports	Total10.00
PoE Power Budget	Total240.00

